

LUMIFIBER FIBER OPTIC SOLUTION



FIBER WALL SOCKET / FIBER SOCKET OUTLET

FEATURES


- Small and light weight
- Can be install on standard 3x3 surface or conceal box
- Use high quality ABS+PC Plastic
- Can Install up to 2 SC Simplex Adapter
- Suitable for indoor wall mount

APPLICATIONS

- Fiber Optic Telecommunication
- LAN (Local Area Network)

TECHNICAL CHARACTERISTIC

| Parameter | Value |
|---------------------------------|------------------------|
| Operating Temperature | -40°C to +50°C |
| Storage Temperature | -40°C to +65°C |
| Relative Humidity | ≤85% (+30°C) |
| Colour | White |
| Weight | 0.05KG |
| Adapter Type | SC Simplex / LC Duplex |
| Adapter Capacity | 2-unit max. |
| Number of cable entrance / exit | 2 in / 2 out |
| Dimension (H x W x D) | 86mm x 86mm x 25mm |

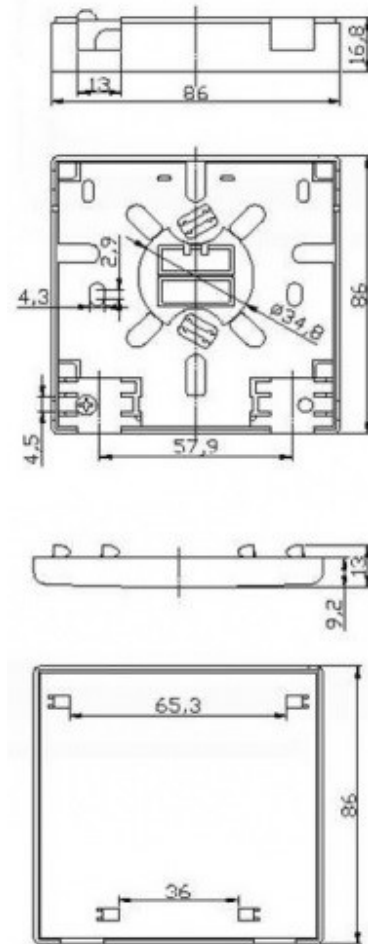

ORDERING INFORMATION

| PRODUCT NUMBER | Number of Port |
|----------------|----------------------------|
| LM-FWS | 01 = 1 Port 02 = 2 Port |