

LUMIFIBER FIBER OPTIC SOLUTION



FIBER OPTIC PATCH PANEL

FEATURES


- Made of cold-roll steel sheet with electro galvanized finishing
- Removable panel design that can full fill different requirement
- Suitable for 19" and 23" equipment rack design
- Compatible with SC, LC, FC, ST, LC, adapter via different mounting plate
- Retractable splicing tray
- Designed to ensure the exceed fiber cords and pigtail in good order

APPLICATIONS

- Fiber Optic Telecommunication
- Optical network equipment
- LAN (Local Area Network)
- CATV
- CWDM (Coarse Wavelength Division Multiplex)

TECHNICAL CHARACTERISTIC

| Parameter | Value |
|-----------------------|---------------------|
| Operating Temperature | -25°C to +40°C |
| Storage Temperature | -25°C to +55°C |
| Relative Humidity | ≤85% (+30°C) |
| Colour | Powder Coated Black |
| Dimension | 1U x 485mm x 220mm |

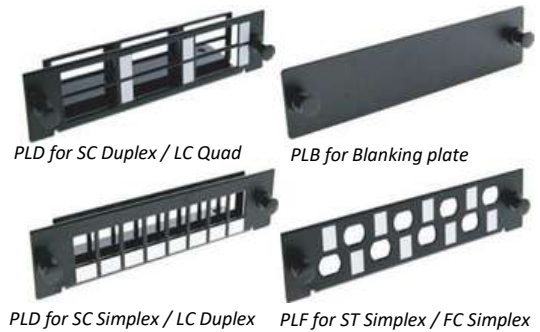

ORDERING INFORMATION

| PRODUCT NUMBER | Number of Port | Fiber type | Adapter Type |
|----------------------------|---|--|---|
| LM-FPP = Fiber Patch Panel | 06 = 6 Port 12 = 12 Port 24 = 24 Port | SM = Single Mode OS1 OM2 = Multi Mode OM2 OM3 = Multi Mode OM3 OM4 = Multi Mode OM4 OM5 = Multi Mode OM5 | SCD = SC Duplex SCS = SC Simplex LCD = LC Duplex LCQ = LC Quad ST = ST FC = FC |